


## LD Series All-Plastic Leak Detection Sensor

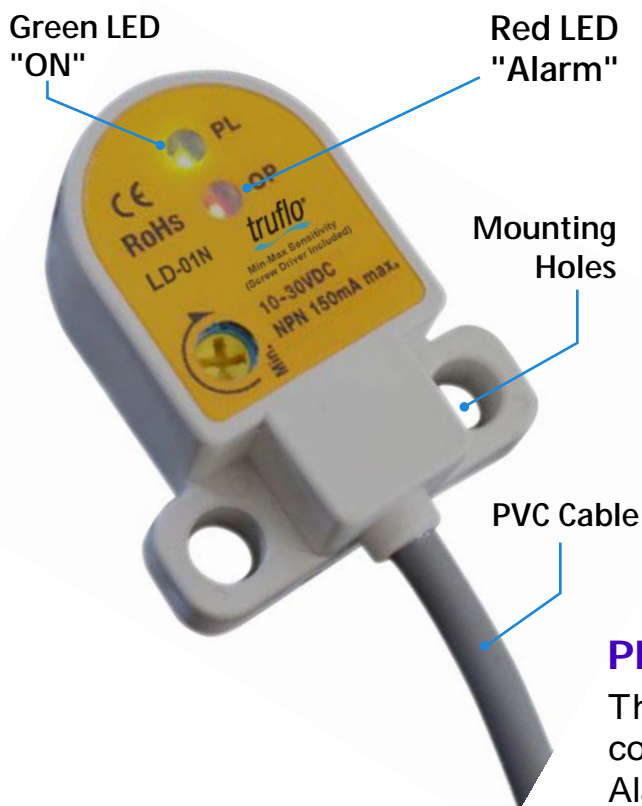

- Floor Design
- Capacitive, Fail-Safe Design
- Perfect for Aggressive and Electrically Conductive Corrosive Chemicals

### APPLICATIONS

- ▶ Containment Dikes
- ▶ Double Wall Tanks
- ▶ Leakage Basins or Container
- ▶ Computer Rooms
- ▶ Leaking Pumps

### PRINCIPLE

The transmitter LD Series is designed to detect conductive liquids providing a SSR relay NPN Pulse Alarm.

- ▶ NPN Pulse Output, numeric input

### TECHNICAL FEATURES

SPECIFICATION	DESCRIPTION
Power Consumption	Approx. 3 W
Ambient Temperature	-20 to +60°C -20-140°F
Outputs:	<ul style="list-style-type: none"> <li>• Switch : NPN, maximum 150 mA</li> <li>• Switch [+AO / -AO]</li> </ul>

### CODE NUMBERS AND REFERENCES

Code	Description
LD-01N	Compact Leak Detector with 2mm of Cable

### INSTALLATION

